

**C5ISR Case study: Vehicle-powered portable digital radio**

## Providing well-regulated 48V at over 1kW



### Customer's challenge

A performance upgrade to an existing vehicle-mounted radio providing voice and data communications across the battlefield required 1kw of power – that needed tight regulation – to power upgraded performance features. Key goals were:

- Provide well-regulated 48V with high power
- Use an existing cold wall for thermal dissipation
- Fit in a very small, existing space




### The Vicor solution

Vicor high-performance power modules provided a lightweight, compact, power-dense solution that both fit within the existing space, but all provided the power necessary. With 800W/in<sup>3</sup> of power density, the MIL-COTS DCM3623 provided the efficiency required to reduce heat and improve reliability critical to vetronics applications. Key benefits were:

- High peak RF output power
- Compact, efficient power delivery
- Low-profile packaging that can utilize the cold wall

## The power delivery network

This PDN boosts the MIL-STD-704 28V bus to a regulated 48V using a MIL-COTS DCM3623 DC-DC converter module. The regulated 48V from the DCM™ charges a large capacitor required to deliver the high peak power required by the RF stage. The low profile (7.62mm) of the thermally adept DCM facilitates a cooling solution utilizing an available cold wall, which along with the 800W/in<sup>3</sup> DCM power density, further reduces the footprint of the PDN. The high efficiency of the DCM reduces the waste heat and improves reliability, while its high frequency helps reduce EMI. The MFM™ DCM filter are DC front end modules used in conjunction with DCMs and provide EMI filtering and transient protection to meet MIL standards.

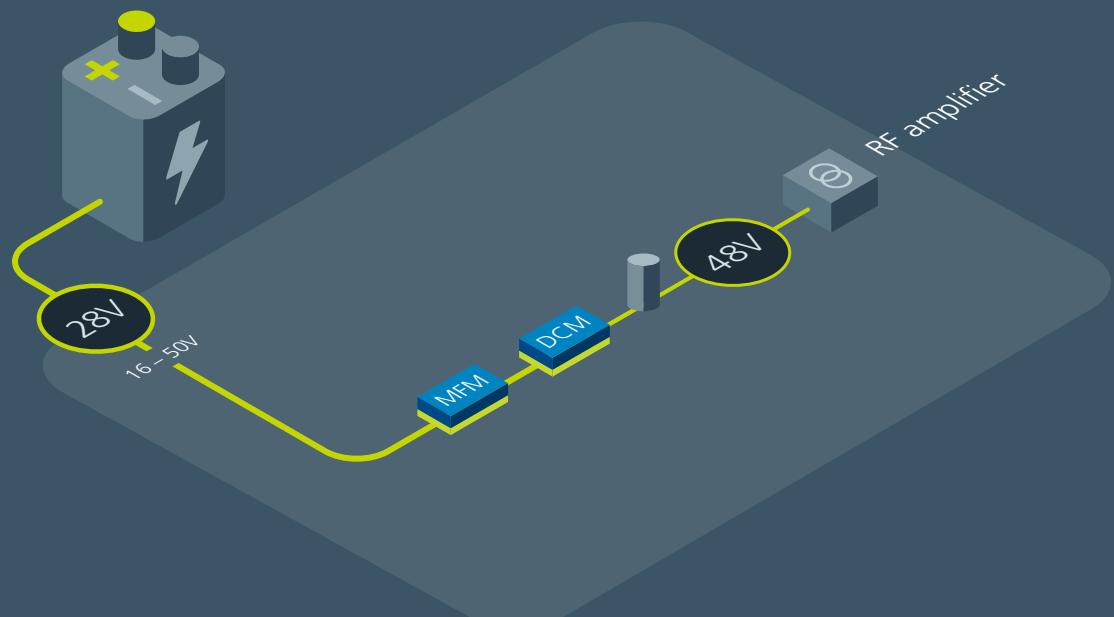

MIL-COTS DCM™  
DC-DC converter

Isolated regulated  
Input: 28, 30, 270V

Output: 3.3, 5, 12, 15, 24, 28,  
48V

Power: Up to 1300W

Peak efficiency: 96%

As small as  
0.98 x 0.90 x 0.28in

[vicorpower.com/mil-cots-dcm](http://vicorpower.com/mil-cots-dcm)



MIL-COTS MFM™ filter

Input filter for DCMs

Input: 28V (16 – 50V),  
270V (160 – 420V)

Current: Up to 22A

As small as 44.6 x 35.5 x 9.2mm

[vicorpower.com/mfm](http://vicorpower.com/mfm)